

# ACCZENT CLASSIC 40



Simply fit: a comfortable solution for smooth and safe daily light commercial or home use

## SENSORIAL BENEFITS


- Available in 2, 3 and 4 meter widths
- Large palette of classic and modern designs

## FUNCTIONAL BENEFITS

- Good underfoot & acoustic comfort
- Good cleaning & maintenance properties

## ENVIRONMENTAL BENEFITS

- REACH Compliant
- Better indoor air quality

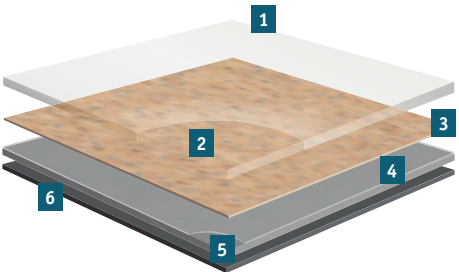

- 1 Easy maintenance and very high resistance to scratches:  
*TopClean PUR reinforcement treatment*
- 2 Resistance to abrasion:  
*0.40mm pure PVC transparent wear layer*
- 3 High definition print
- 4 Superior dimensional stability ( $\leq 0.40\%$ ):  
*Glass fibre non-woven reinforcement*
- 5 Resistance to indentation and tearing:  
*Solid homogeneous calendered sheet made of recycled vinyl*
- 6 PVC Backing

ACCZENT CLASSIC 40

| TECHNICAL DATA                           | STANDARDS                        | ACCZENT CLASSIC 40                                                                                                                 |
|------------------------------------------|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Classification                           |                                  |                                                                                                                                    |
| Classification                           | ISO 10874 (EN 685) commercial    | Class: 32                                                                                                                          |
| Characteristics                          |                                  |                                                                                                                                    |
| Total thickness                          | ISO 24346 (EN 428)               | 2.00mm                                                                                                                             |
| Wear layer thickness                     | ISO 24340 (EN430)                | 0.40mm                                                                                                                             |
| Total weight                             | ISO 23997 (EN 430)               | 2 150g/m <sup>2</sup>                                                                                                              |
| PU treatment                             | -                                | TopClean                                                                                                                           |
| Abrasion group                           | EN 660-2                         | Group T: $\leq 2\text{mm}^3$                                                                                                       |
| Technical performances                   |                                  |                                                                                                                                    |
| Residual indentation                     | Average measured value           | $\leq 0.10\text{mm}$                                                                                                               |
|                                          | ISO 24343-1 (EN 433) requirement |                                                                                                                                    |
| Reaction to fire                         | EN 13501-1                       | B <sub>fl</sub> s1 glued over any A2 <sub>fl</sub> or A1 <sub>fl</sub> substrate (concrete) and over any derivative wood substrate |
| Slip resistance                          | DIN 51130<br>EN 13893            | R10<br>$\mu \geq 0.30$                                                                                                             |
| Dimensional stability                    | ISO 23999 (EN 434)               | $\leq 0.40\%$                                                                                                                      |
| Castor wheel test                        | ISO 4918 (EN 425)                | No damage                                                                                                                          |
| Curl resultant to heat                   | ISO 23999 (EN 434)               | $\leq 8\text{mm}$                                                                                                                  |
| Electrostatic properties                 | EN 1815<br>EN 1081               | $\leq 2\text{kV}$ on concrete<br>$R1 > 10^{10}$ ohms                                                                               |
| Chemical resistance                      | ISO 26987 (EN 423)               | High resistance                                                                                                                    |
| Hygiene                                  | -                                | Does not contribute to infection spreading                                                                                         |
| Thermal resistance<br>Underfloor heating | EN ISO 10456                     | 0.02m <sup>2</sup> K/W<br>Suitable                                                                                                 |
| Light fastness                           | EN ISO 105-B02                   | $\geq 6$                                                                                                                           |
| Impact sound reduction                   | EN ISO 10140-8<br>EN ISO 717/2   | $\Delta L_w = 13\text{dB}$                                                                                                         |
|                                          |                                  |                                                                                                                                    |
| Form of delivery                         | EN 24341 (EN 426)                | approx. 25lm x 2, 3 & 4m                                                                                                           |
| Colours                                  |                                  | 34 (Wood: 13 - Rock: 3 - Antia: 1 - Moda: 11 - Technivision: 6)                                                                    |

The above information is subject to modifications for the benefit of further improvement (01/2014).  
For more detailed technical information, please contact Tarkett.



Download the product offer

# ACCZENT CLASSIC 40



## Beech



Natural

5620 001  
5619 001  
5618 001

## Oak



Beige Yellow

5620 006  
5619 006  
5618 006

5620 002  
5619 002  
5618 002

## Classical Oak



Natural

5620 008  
5619 008  
5618 008

## Noyer



Natural

5620 021  
5619 021  
5618 021

## Robur



Natural

5620 023  
5619 023  
5618 023



Medium Natural

5620 027  
5619 027  
5618 027



White

5620 022  
5619 022  
5618 022



Light Natural

5620 028  
5619 028  
5618 028

## Teak



Brown

5620 005  
5619 005  
5618 005

## Gea



Light Brown

5620 003  
5619 003  
5618 003



Middle Beige


5620 024  
5619 024  
5618 024



Light Warm Brown

5620 025  
5619 025  
5618 025

## Antia




Black

5620 011  
5619 011  
5618 011

| TECHNICAL DATA                        | STANDARDS                        | ACCZENT CLASSIC 40                                                                                                              |
|---------------------------------------|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Classification                        |                                  |                                                                                                                                 |
| Classification                        | ISO 10874 (EN 685) commercial    | Class: 32                                                                                                                       |
| Characteristics                       |                                  |                                                                                                                                 |
| Total thickness                       | ISO 24346 (EN 428)               | 2.00mm                                                                                                                          |
| Wear layer thickness                  | ISO 24340 (EN430)                | 0.40mm                                                                                                                          |
| Total weight                          | ISO 23997 (EN 430)               | 2 150g/m²                                                                                                                       |
| PU treatment                          | -                                | TopClean                                                                                                                        |
| Abrasion group                        | EN 660-2                         | Group T: ≤ 2mm³                                                                                                                 |
| Technical performances                |                                  |                                                                                                                                 |
| Residual indentation                  | Average measured value           | ≤ 0.10mm                                                                                                                        |
|                                       | ISO 24343-1 (EN 433) requirement |                                                                                                                                 |
| Reaction to fire                      | EN 13501-1                       | B <sub>s</sub> s1 glued over any A2 <sub>s</sub> or A1 <sub>s</sub> substrate (concrete) and over any derivative wood substrate |
| Slip resistance                       | DIN 51130 EN 13893               | R10<br>μ ≥ 0.30                                                                                                                 |
| Dimensional stability                 | ISO 23999 (EN 434)               | ≤ 0.40%                                                                                                                         |
| Castor wheel test                     | ISO 4918 (EN 425)                | No damage                                                                                                                       |
| Curl resultant to heat                | ISO 23999 (EN 434)               | ≤ 8mm                                                                                                                           |
| Electrostatic properties              | EN 1815 EN 1081                  | ≤ 2kV on concrete<br>R1 > 10 <sup>10</sup> ohms                                                                                 |
| Chemical resistance                   | ISO 26987 (EN 423)               | High resistance                                                                                                                 |
| Hygiene                               | -                                | Does not contribute to infection spreading                                                                                      |
| Thermal resistance Underfloor heating | EN ISO 10456                     | 0.02m² K/W Suitable                                                                                                             |
| Light fastness                        | EN ISO 105-B02                   | ≥ 6                                                                                                                             |
| Impact sound reduction                | EN ISO 10140-8 EN ISO 717/2      | ΔL <sub>w</sub> = 13dB                                                                                                          |


The above information is subject to modifications for the benefit of further improvement (01/2014).  
For more detailed technical information, please contact Tarkett.

## Rock



Snow Beige

5620 026  
5619 026  
5618 026

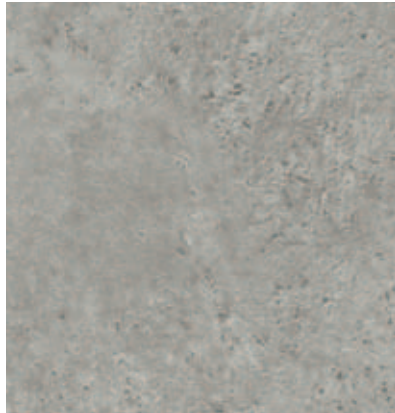

Grey Black

5620 020  
5619 020  
5618 020



Light Grey

5620 016  
5619 016  
5618 016

# ACCZENT CLASSIC 40

## Wood / Rock / Antia

## Main Product Features

- Comfortable floor with 13dB acoustic
- Available in 2, 3 and 4 meter widths
- Woods & neutral designs

## Surface Treatment



## Sustainability Tag




(1) Progressively for all our professional vinyl products during 2014

## Logistics Information



Available in rolls:  
2m, 3m & 4m  
Rolls length: 25lm

Laying direction:



Wood

## General Information



Manufactured by: Tarkett Luxembourg SA  
L-9179-Lentzweiler-Luxembourg  
According to European  
Classification ISO 10874 (EN 685)



Play with the Room Designer




# ACCZENT CLASSIC 40



Moda - Black

## Moda




Anthracite

5719 001  
5715 001  
5708 001



Light Grey

5719 002  
5715 002  
5708 002




Grey

5719 004  
5715 004  
5708 004




Red

5719 005  
5715 005  
5708 005



Blue

5719 006  
5715 006  
5708 006




Green

5719 007  
5715 007  
5708 007




Beige Red

5719 008  
5715 008  
5708 008



Black

5719 011  
5715 011  
5708 011



White

5719 013  
5715 013  
5708 013



Light Beige


5719 014  
5715 014  
5708 014

## Techvision




Soft Beige

5719 015  
5715 015  
5708 015



Metallic

27002 001  
27001 001  
27000 001



Dark Grey

27002 002  
27001 002  
27000 002



Gold

27002 003  
27001 003  
27000 003



Light Blue

27002 004  
27001 004  
27000 004

| TECHNICAL DATA                        | STANDARDS                        | ACCZENT CLASSIC 40                                                                                                              |
|---------------------------------------|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| <b>Classification</b>                 |                                  |                                                                                                                                 |
| Classification                        | ISO 10874 (EN 685) commercial    | Class: 32                                                                                                                       |
| <b>Characteristics</b>                |                                  |                                                                                                                                 |
| Total thickness                       | ISO 24346 (EN 428)               | 2.00mm                                                                                                                          |
| Wear layer thickness                  | ISO 24340 (EN430)                | 0.40mm                                                                                                                          |
| Total weight                          | ISO 23997 (EN 430)               | 2 150g/m²                                                                                                                       |
| PU treatment                          | -                                | TopClean                                                                                                                        |
| Abrasion group                        | EN 660-2                         | Group T: ≤ 2mm³                                                                                                                 |
| <b>Technical performances</b>         |                                  |                                                                                                                                 |
| Residual indentation                  | Average measured value           | ≤ 0.10mm                                                                                                                        |
|                                       | ISO 24343-1 (EN 433) requirement |                                                                                                                                 |
| Reaction to fire                      | EN 13501-1                       | B <sub>s</sub> s1 glued over any A2 <sub>s</sub> or A1 <sub>s</sub> substrate (concrete) and over any derivative wood substrate |
| Slip resistance                       | DIN 51130 EN 13893               | R10<br>μ ≥ 0.30                                                                                                                 |
| Dimensional stability                 | ISO 23999 (EN 434)               | ≤ 0.40%                                                                                                                         |
| Castor wheel test                     | ISO 4918 (EN 425)                | No damage                                                                                                                       |
| Curl resultant to heat                | ISO 23999 (EN 434)               | ≤ 8mm                                                                                                                           |
| Electrostatic properties              | EN 1815 EN 1081                  | ≤ 2kV on concrete<br>R1 > 10 <sup>10</sup> ohms                                                                                 |
| Chemical resistance                   | ISO 26987 (EN 423)               | High resistance                                                                                                                 |
| Hygiene                               | -                                | Does not contribute to infection spreading                                                                                      |
| Thermal resistance Underfloor heating | EN ISO 10456                     | 0.02m² K/W<br>Suitable                                                                                                          |
| Light fastness                        | EN ISO 105-B02                   | ≥ 6                                                                                                                             |
| Impact sound reduction                | EN ISO 10140-8 EN ISO 717/2      | ΔL <sub>w</sub> = 13dB                                                                                                          |

The above information is subject to modifications for the benefit of further improvement (01/2014).  
For more detailed technical information, please contact Tarkett.

## Techvision



Dark Brown

27002 005  
27001 005  
27000 005



Black

27002 006  
27001 006  
27000 006

# ACCZENT CLASSIC 40 Moda Techvision

## Main Product Features

- Comfortable floor with 13dB acoustic
- Available in 2, 3 and 4 meter widths
- Woods & neutral designs

## Surface Treatment



## Sustainability Tag



(1) Progressively for all our professional vinyl products during 2014

## Logistics Information



Available in rolls:  
2m, 3m & 4m  
Rolls length: 25lm

Laying direction:



## General Information



Play with the Room Designer