







PAL2703











PAL182B PAL2792 PAL182A PAL1817

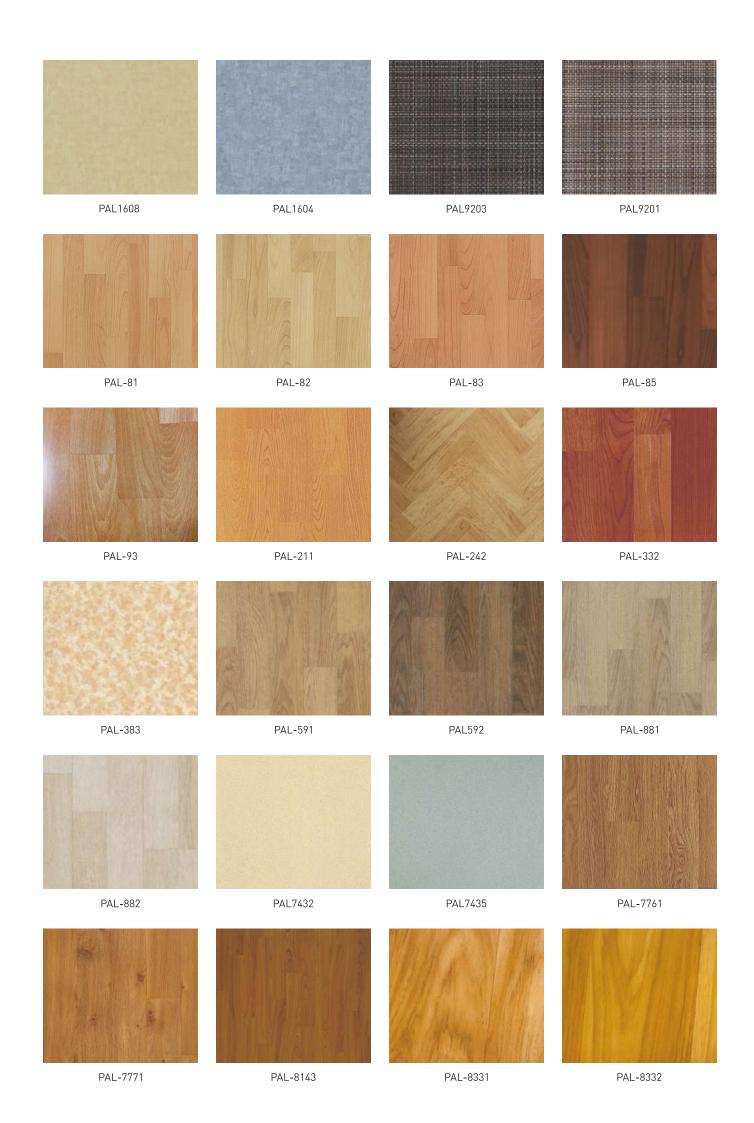

## PALACE

## **SPECIFICATIONS**

THICKNESS	WIDTH	LENGTH
1.5 mm	2 m	25 m

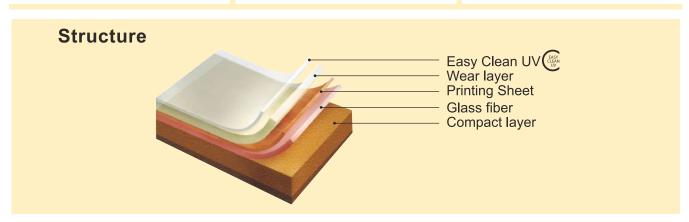

## **TECHNICAL INFORMATION**

Item (Direction)	Unit	Standard Valve	Tested Method
Dimensional Stability	% (L) % (W)	Not more than ± 0.15	ASTM D 1204 DIN EN 651
Indentation	mm	Not more than 0.3	ASTM F 387 DIN EN 429
Indentation on Residual	%	Not more than 2.5	ASTM F 387 DIN EN 429
Abrasion	g	Not more than 0.2	ASTM F 3884 DIN EN 429

## **FEATURES:**

- · Anti contamination · Anti microbial · Excellent anti-indentation with extra hard surface
- High dimensional stability with glass fiber layer Quick and easy installation Elegant & realistic patterns

Applications: Office, Shop, Domestic areas, Bedroom, Kitchen, Children's room

Maintenance: Vacuuming/dry mopping daily with a clean cloth to remove dust, Wet mopping with mild recommended detergent to remove stains once or twice a week, Maintain high surface shining with recommended Liquid wax polish in prescribed proportions, periodically

\* Use of good quality *entrance mat* is recommended to minimise entry of dust.

